


FAST. FORWARD.

JAM-11F

1 to 2 Hz, 0.8+ mJ, 5 ns diode-pumped passively Q-switched erbium glass laser transmitter


SPECIFICATIONS	
Wave	1.54 μ m (IC) - 54 mW (2 I) - 1000 Hz (100) - 410 (E) - 10
Pulse Repetition Rate	1 to 2 Hz
Laser Pulse	5 ns nominal
Raw Beam Diameter	0.4 mm nominal
Beam Divergence (D4 method)	5.6 mrad nominal
Beam Quality	Gaussian-like in X & Y (far field)
Average Radial Beam Wander	< 0.5 mrad
Nominal Radial Beam Wander	0.18 mrad
Laser Head Size	0.54 in x 0.71 in x 1.25 in 1.37 cm x 1.80 cm x 3.18 cm
Laser Head Weight	26 g
Laser Operational Temperature	-40°C to +71°C
Laser Storage Requirement	-55°C to +90°C, dewpoint kept -20°C
Electrical Requirements	2 V, 100 A, < 3 ms
Conductive Cooling Requirements	< 1.2 W
Integrated Photodiode	No
Laser Classification	Class 1

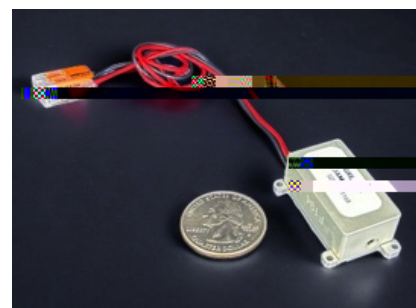

The JAM-11F is an "eye-safe" 1.54 μ m diode-pumped passively q-switched Erbium glass laser transmitter with no integrated photodiode.

ABOUT L3HARRIS

L3Harris is an ISO 9001:2015 certified full-service manufacturer of miniature eye-safe diode-pumped 1.54 μm Erbium glass laser transmitters and specialty laser and filter glass material. These items are used in applications including laser range finding, range gate imaging, Light Detection and Ranging (LIDAR) and Laser-Induced Breakdown Spectroscopy (LIBS).

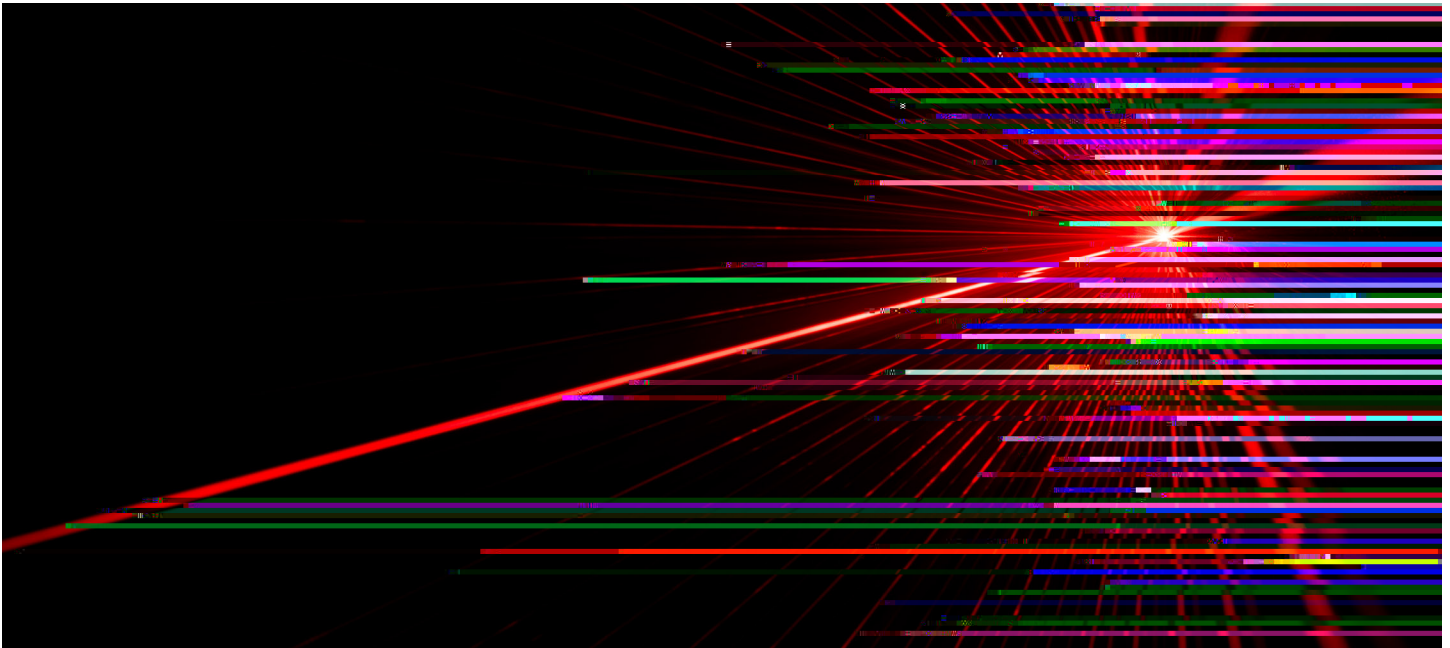

JAM-11F

© 2024 L3Harris Technologies, Inc. | 10/2024 | L27403

NON-EXPORT CONTROLLED: THIS DOCUMENT CONSISTS OF INFORMATION THAT IS NOT DEFINED AS CONTROLLED TECHNICAL DATA UNDER ITAR PART 120.33 OR TECHNOLOGY UNDER EAR PART 772.

L3Harris Technologies is the Trusted Disruptor in the defense industry. With customers' mission-critical needs always in mind, our employees deliver end-to-end technology solutions connecting the space, air, land, sea and cyber domains in the interest of national security. Visit [L3Harris.com](https://www.l3harris.com) for more information.